



NEW

## N314T-8

- SCREW-ON
- BOLT-ON


### SPECIFICATION

Throat Size	1.4", 35.6 mm
Nominal Impedance*	8 Ω
Minimum Impedance	6.7 ohm @ 3.7 kHz
Power Rating**	100 W (AES)
Resonance	550 Hz
DC Resistance (Re)	4.80 Ω
Usable Frequency Range	800 Hz - 20 kHz
Recommended Crossover	800 Hz / 12 dB
Sensitivity***	110.9 dB
Magnet Material	Neodymium
Magnet Weight	11 oz, 0.31 kg
Voice Coil Diameter	3.0", 76 mm
Voice Coil Former	Polyimide
Diaphragm Material	Titanium

### MOUNTING INFORMATION

Overall Diameter	5.72", 145.3 mm
Driver Volume Displaced	0.023 cu.ft., 0.66 liters
Depth	2.53", 64.3 mm
Net Weight	5.1 lb, 2.3 kg
Shipping Weight	5.4 lb, 2.4 kg
Mounting Thread	N/A
Mounting Holes Diameter	4X 1/4-20
Mounting Holes B.C.D.	4.00", 101.6 mm

### FREQUENCY RESPONSE & IMPEDANCE CURVE\*

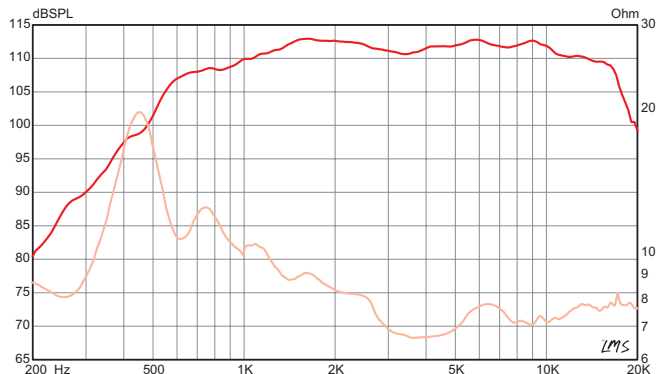

NEW

## N320T-8

- SCREW-ON
- BOLT-ON


### SPECIFICATION

Throat Size	2.0", 50.8 mm
Nominal Impedance*	8 Ω
Minimum Impedance	6.7 ohm @ 3.6 kHz
Power Rating**	100 W (AES)
Resonance	521 Hz
DC Resistance (Re)	4.80 Ω
Usable Frequency Range	800 Hz - 20 kHz
Recommended Crossover	800 Hz / 12 dB
Sensitivity***	110.4 dB
Magnet Material	Neodymium
Magnet Weight	11 oz, 0.31 kg
Voice Coil Diameter	3.0", 76 mm
Voice Coil Former	Polyimide
Diaphragm Material	Titanium

### MOUNTING INFORMATION

Overall Diameter	5.72", 145.3 mm
Driver Volume Displaced	0.028 cu.ft., 0.81 liters
Depth	3.10", 78.7 mm
Net Weight	5.5 lb, 2.5 kg
Shipping Weight	5.8 lb, 2.6 kg
Mounting Thread	N/A
Mounting Holes Diameter	4X 1/4-20
Mounting Holes B.C.D.	4.00", 101.6 mm

### FREQUENCY RESPONSE & IMPEDANCE CURVE\*

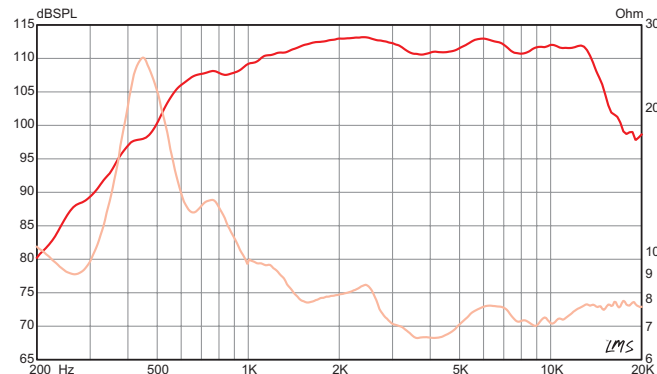

\* See footnotes on the following page for information regarding usable frequency range, nominal impedance, power rating and sensitivity.



*From design and manufacturing to the stage or studio. Once you've experienced the performance of Eminence, you'll never accept anything else.*

## MISSION STATEMENT

*Eminence is dedicated to providing the best Quality, Value and Service to meet our customers' needs.*

## FOOTNOTES

- \* Please consult [www.eminence.com](http://www.eminence.com) for specifications of models with alternative impedances.
- \*\* Multiple units exceed published ratings evaluated under EIA 426A specification while tested in a free-air, non-temperature-controlled environment.
- \*\*\* The average output across the usable frequency range when applying 1W/1m into the nominal impedance. i.e: 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2 ft. x 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Carver PM-120 amplifier | 2700 cu. ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).
- \*\*\*\* BETA 8CX, 10CX, and 12CX are coaxial speakers with tweeter sold separately. Published usable frequency response contingent upon use of ASD:1001 HF Driver.
- \*\*\*\*\* Multiple units exceeded published ratings evaluated under EIA-426A or AES specification while mounted on Eminence's H290, H290S, or H2EA horn in a non-temperature-controlled environment.
- \*\*\*\*\*The average on axis output across the entire usable frequency range when applying 1W/1m into the nominal impedance, i.e. 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft x 2ft baffle is built into the wall with horn front mounted | Carver PM-120 amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).

Prices, specifications and product cosmetics are subject to change without notice.

**EMINENCE SPEAKER LLC**

838 Mulberry Pike, Eminence, KY 40019



*Follow us:*

[EMINENCE.COM](http://EMINENCE.COM)

