



## Specification

Throat Size	1", 25.4mm
Nominal Impedance*	8 or 16 ohms*
Power Rating	80W @ 1.2kHz
(EIA426B Secification, 1.6kHz @ 18dB)	
Resonance	540Hz
Usable Frequency Range	1.2kHz-20kHz
Recommended Crossover	1.2kHz/18dB or 1.8kHz/12dB
Sensitivity	106.1dB (1W/1m across 1.2kHz-20kHz)
Magnet Weight	34 oz.
Voice Coil Diameter	2", 51mm
Re	6.1


## Mounting Information

Overall Diameter	5.25", 133mm
Mounting Holes Diameter	2X 1/4-20 or 3" M6
Mounting Holes B.C.D.	3" or 2.25"
Mounting Thread	1 3/8" 18 NEF ext.
Depth	2.2", 56mm
Weight	5 lbs, Gross 5.76 lbs

## Materials of Construction

Voice Coil Former	Polyimide
Diaphragm Material	Titanium
Magnet Composition	Ferrite

## PSD:2002 HF Drivers

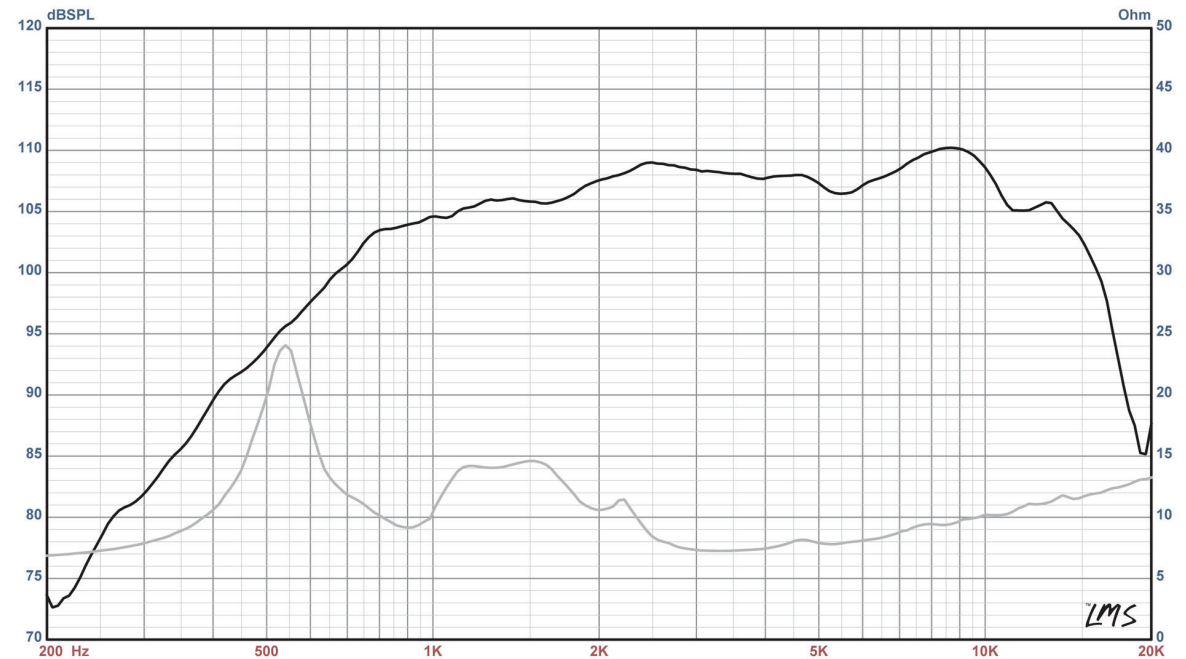

\* Please inquire about alternative impedances.

A negative voltage at the red terminal causes a positive pressure at the output of the device.